

# AES256-GCM-100G IP Core

March 9, 2023

Product Specification

Rev1.00



## Design Gateway Co.,Ltd

E-mail: ip-sales@design-gateway.com

URL: design-gateway.com

## Features

- Support AES-GCM mode standard.
- Support 256-bit key size, 96-bit iv size.
- Support zero-length AAD or data input.
- Peak throughput rate at 512 Mbits/MHz.
- Speed up to 138.24 Gbps @270MHz.

Core Facts	
Provided with Core	
Documentation	User Guide, Design Guide
Design File Formats	Encrypted File
Instantiation Templates	VHDL
Reference Designs & Application Notes	Vivado Project, See Reference design manual
Additional Items	Demo on KCU116/ZCU106
Support	
Support Provided by Design Gateway Co., Ltd.	

Table 1: Example Implementation Statistics (UltraScale+)

Family	Example Device	Fmax (MHz)	CLB Regs	CLB LUTs	CLB	IOB	BRAMTile	Design Tools
Kintex-UltraScale+	xcku5p-ffvb676-2-e	270	12820	63325	10990	-	-	Vivado2021.1
Zynq-Ultrascale+	xczu7ev-ffvc1156-2-e	240	12821	61289	10753	-	-	Vivado2021.1
Virtex-Ultrascale+ <sup>2</sup>	xcvu9p-flga2104-2L-e	250	12821	62864	11165	-	-	Vivado2021.1

Table 2: Example Implementation Statistics (Versal)

Family	Example Device	Fmax (MHz)	CLB Regs	CLB LUTs	Slice <sup>1</sup>	IOB	BRAMTile	Design Tools
Versal AI Core <sup>2</sup>	xcvc1902-vsva2197-2MP-e-S	240	12814	69542	10828	-	-	Vivado2021.1

Notes:

- 1) Actual logic resource dependent on percentage of unrelated logic
- 2) The results were obtained from implementation in the same environment, but have not been tested on the actual board.

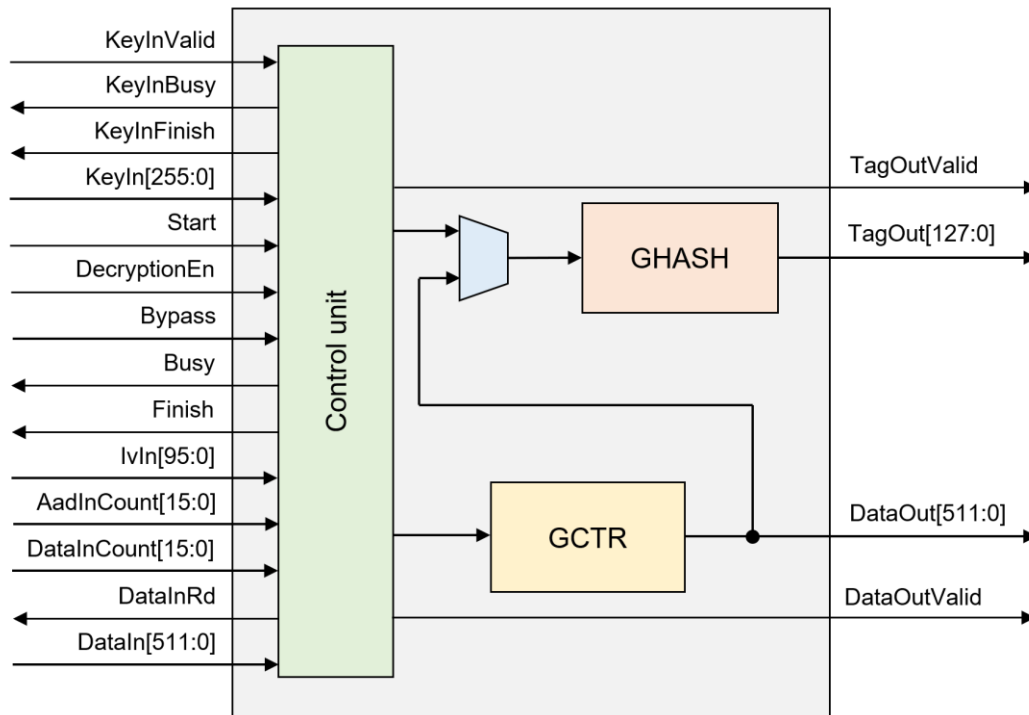


Figure 1: Block Diagram

## General Description

AES256-GCM-100G IP Core (AES256GCM100GIP) implement the advanced encryption standard (AES) with 256-bit key in Galois/Counter Mode (GCM) which is widely used for Authenticated Encryption with Associated Data (AEAD) application, including IPSEC, MACSEC and TLS (Transport Layer Security) versions 1.2 and 1.3. Additionally, AES-GCM is used in fiber channel communications and storage applications.

AES256GCM100GIP works with 256-bit AES-key and 96-bit Initialization Vector (IV). It can provide confidentiality and data authentication by using Additional Authenticated Data (AAD) and authentication tag. It is designed to support zero-length plaintext/ciphertext input which is the special case of GCM mode, called GMAC, and also support zero-length AAD.

There are 2 main operations in AES-GCM, AES encryption/decryption by GCTR and tag calculation by GHASH algorithm. AES256GCM100GIP can operate 512-bit data every clock cycle, as a result, it can operate at speed up to 138.24 Gbps at 270MHz, which can be used effectively on 100G Ethernet.

## Functional Description

AES256GCM100G interface signals can be divided into 3 parts, i.e., Key setting signals, parameter setting signals and data control signals.

**Table 3: Interface signals of AES256GCM100GIP**

Signal name	Dir	Description
RstB	In	IP core system reset. Active low.
Clk	In	IP core system clock.
version[31:0]	Out	32-bit version number of AES256GCM100GIP.
<b>Key setting signals</b>		
KeyInValid	In	KeyInValid is a user signal to specify data valid of KeyIn. Assert to '1' to set up KeyIn into AES256GCM100GIP.
KeyInBusy	Out	KeyInBusy specifies busy status of Key setting. Assert to '1' after user set KeyInValid, until the last cycle of operation. KeyInValid or Start will be ignored while KeyInBusy is '1'.
KeyInFinish	Out	KeyInFinish specifies finish status of Key setting. Assert to '1' at the last cycle of operation.
KeyIn[255:0]	In	KeyIn is 256-bit key data for AES block cipher in CTR mode of operation. KeyIn must be valid when KeyInValid is asserted to '1'.
<b>Parameter setting signals</b>		
Start	In	Start is a user signal to start AES256GCM100GIP operation.
DecryptionEn	In	DecryptionEn is a user signal to specify mode of operation. DecryptionEn='0' for encryption, DecryptionEn='1' for decryption. DecryptionEn must be valid during operation.
Bypass	In	Bypass is a user signal to specify bypass mode of operation. Bypass='0' for encryption/decryption mode, Bypass='1' for bypass mode. Bypass must be valid during operation.
Busy	Out	Busy specifies busy status of operation. Busy is active after user set Start, until operation is done. KeyInValid or Start will be ignored while Busy is '1'.
Finish	Out	Finish specifies finish status of AES256GCM100GIP. Assert to '1' at the last cycle of operation.
IvIn[95:0]	In	IvIn is 96-bit IV data for AES block cipher in CTR mode of operation. IvIn must be valid during operation.
AadInCount[15:0]	In	AadInCount is the number of AAD in byte. AadInCount must be valid during operation.
DataInCount[15:0]	In	DataInCount is the number of input data in byte. DataInCount must be valid during operation.

Data control signals		
DataInRd	Out	DataInRd is a control signal to read DataIn.
DataIn[511:0]	In	DataIn is 512-bit input data, both of AAD and data. DataIn must be valid when DataInRd is asserted to '1'.
DataOutValid	Out	DataOutValid specifies data valid for DataOut. Assert to '1' when cipher data is valid for encryption mode or plain data is valid for decryption mode.
DataOut[511:0]	Out	DataOut is 512-bit data output of AES256GCM100GIP. Valid when DataOutValid is asserted to '1'.
TagOutValid	Out	TagOutValid specifies tag valid. Assert to '1' when tag calculation is done.
TagOut[127:0]	Out	TagOut is 128-bit tag output of AES256GCM100GIP. Valid when TagOutValid is asserted to '1'.

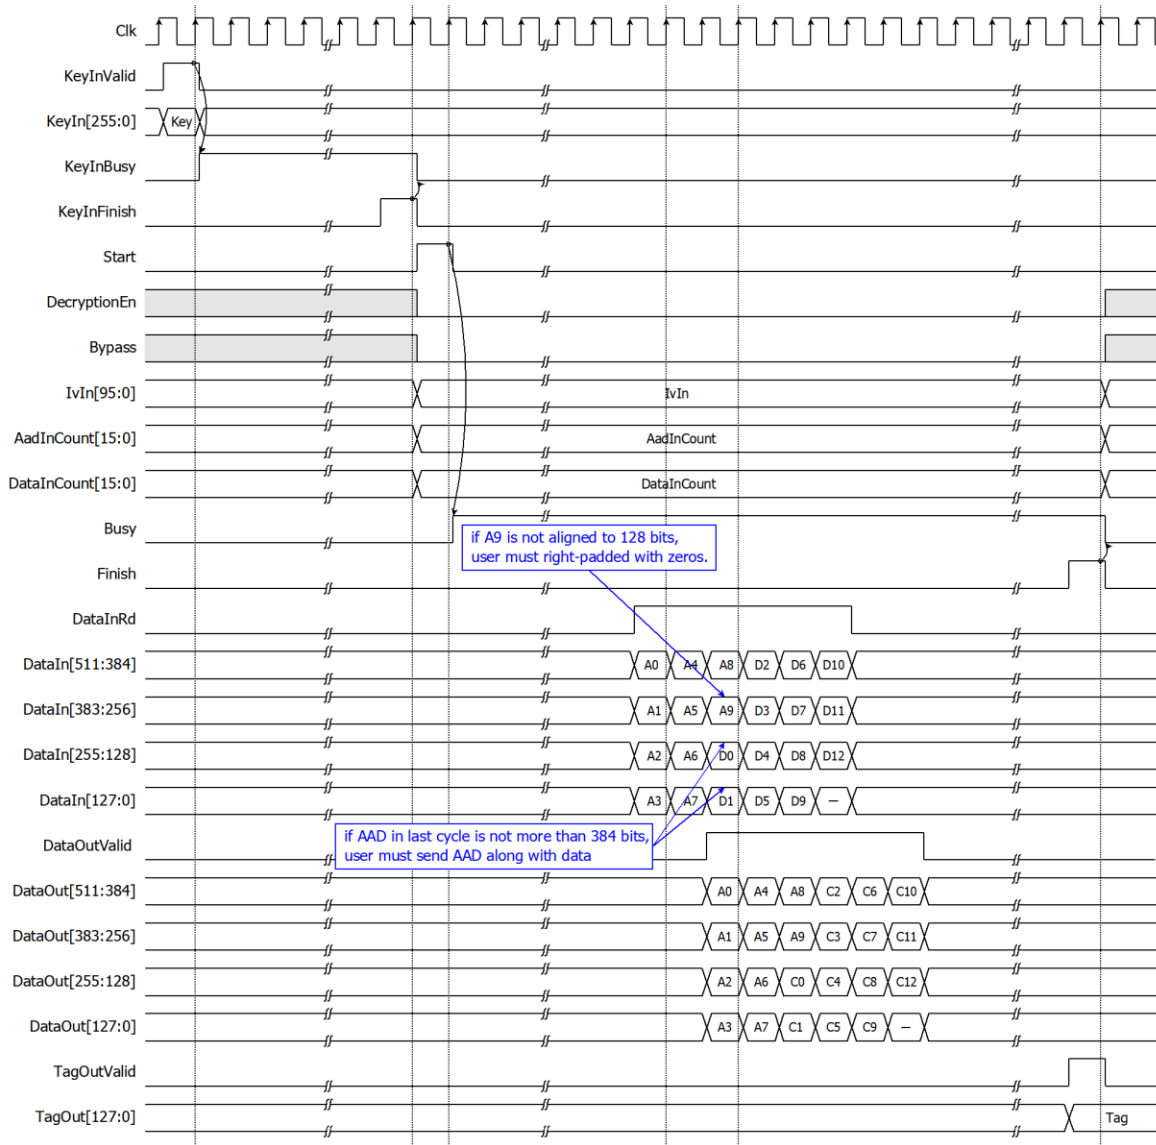


Figure 2: AES256GCM100G timing diagram in encryption mode

AES256GCM100G operation is as simple as 3 step to use as below.

### 1. Key setting

Key setting is the first step to use AES256GCM100G. As shown in Figure 2, AES256GCM100G is started key setting process when KeyInvalid='1'. KeyInBusy is set to be '1' in the next cycle. KeyInFinish is active only one clock at the last cycle of process and KeyInBusy is cleared to '0' in the next cycle. After that, this KeyIn is used for every process and can be changed via KeyInvalid is asserted to '1'.

## 2. Parameter setting

After key setting, AES256GCM100G starts the process when Start is asserted to '1'. DecryptionEn, Bypass, KeyIn, IvIn, AadInCount and DataInCount must be valid when Start='1' and be hold during operation. User can set DecryptionEn to '0' and Bypass to '0' for operating in encryption mode as shown in Figure 2 or set DecryptionEn to '1' and Bypass to '0' for operating in decryption mode as shown in Figure 3. And set Bypass to '1' for operating in Bypass mode as shown in Figure 4.

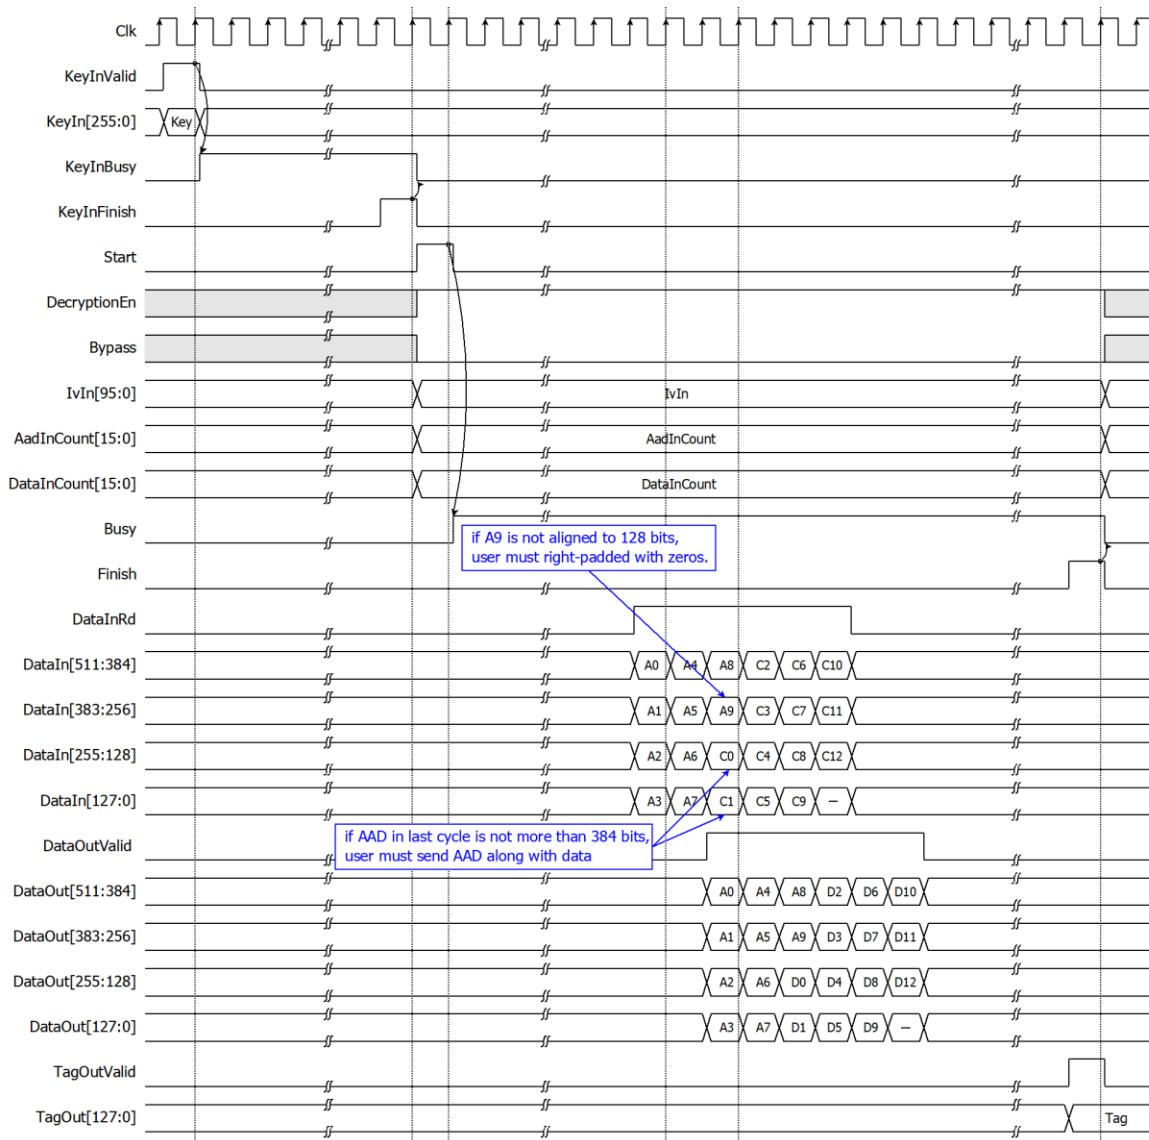
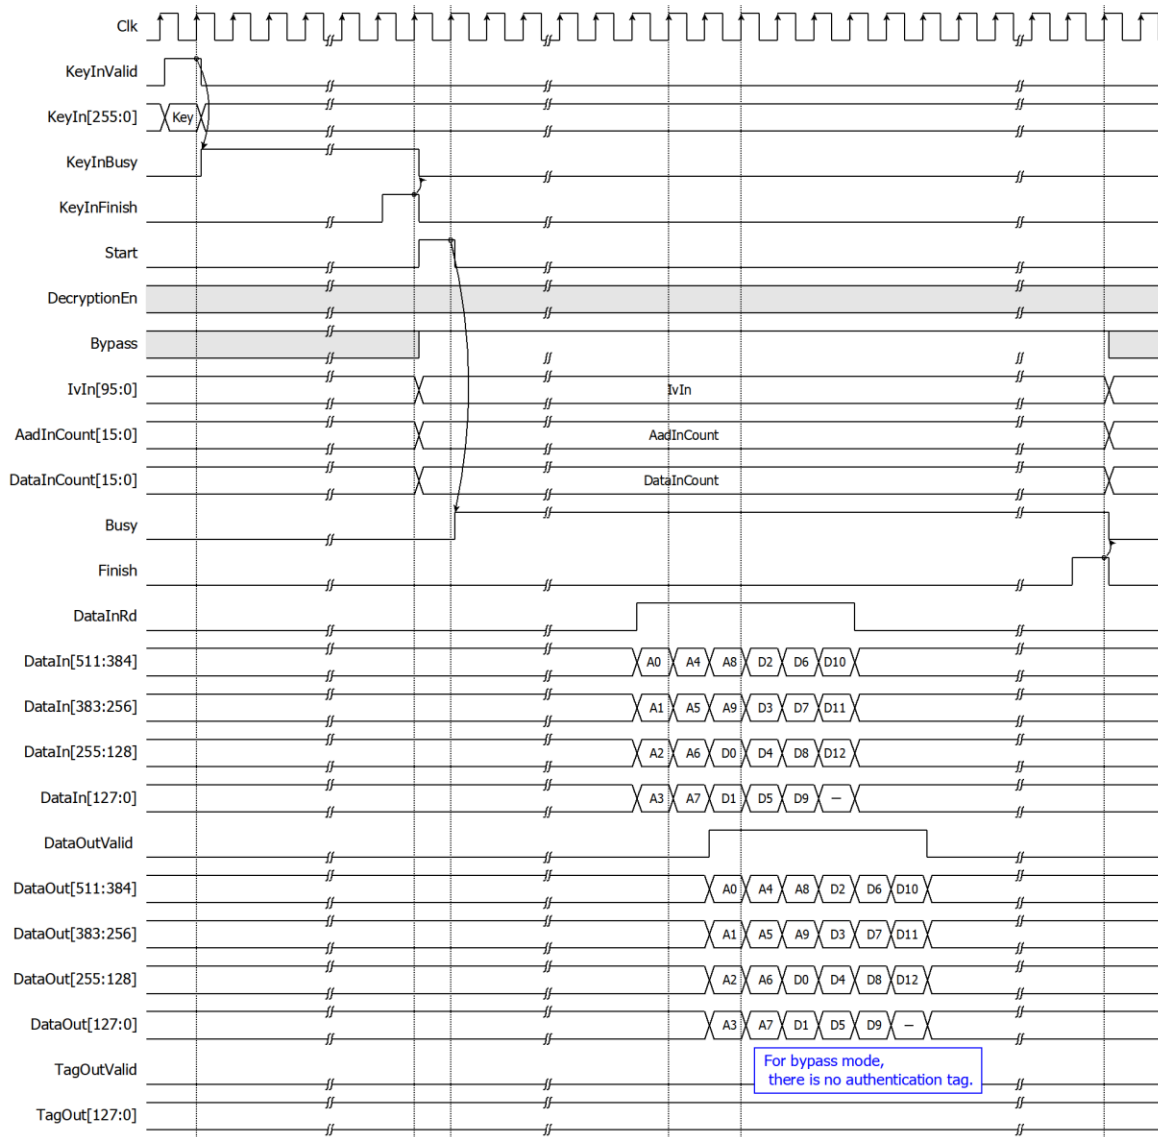
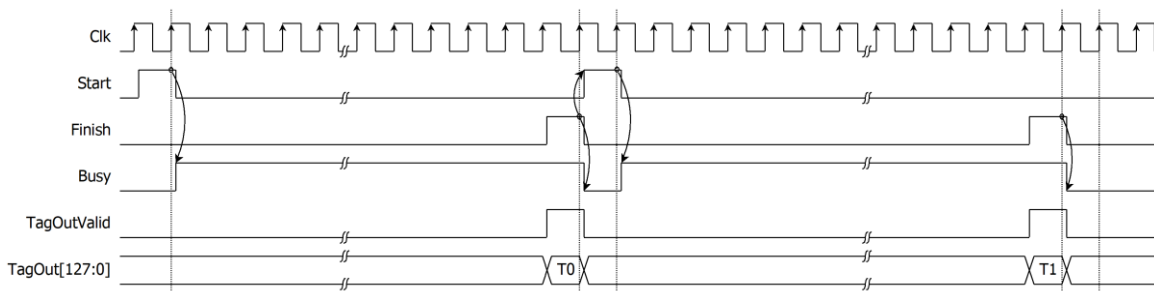


Figure 3: AES256GCM100G timing diagram in decryption mode



**Figure 4: AES256GCM100G timing diagram in Bypass mode**

For the best performance of process, Figure 5 shows the timing diagram of continuous and pipelining process. User can use Finish signal as a trigger signal for setting new parameters and sending new start command in next cycle.



**Figure 5: Continuous and pipelining operation**

### 3. Data control

According to DataIn width is 512 bits (64 bytes) and AES256GCM100G is designed to read DataIn every clock cycle when AES256GCM100G is ready to start encryption/decryption process. After Start is set to begin the operation, user must prepare first valid DataIn[511:0]. Then user can use DataInRd signal as a trigger signal for setting the next DataIn continuously.

Even if DataIn width is 512 bits, but AAD and data is designed to process 128 bits each. If AadInCount is not aligned to 128 bits (16 bytes), the last 128-bit AAD must be right-padded with zeros. And if last cycle of AAD is not more than 384 bits(48 bytes), user must send the next 128-bit data in same clock cycle with AAD.

	bit   511	504	503	496	495	400	399	392	391	384	383	16	15	8	7	0
DataIn0	AAD <sub>Byte0</sub>		AAD <sub>Byte1</sub>		AAD <sub>Byte2 - Byte13</sub>		AAD <sub>Byte14</sub>		AAD <sub>Byte15</sub>		AAD <sub>Byte16 - Byte61</sub>		AAD <sub>Byte62</sub>		AAD <sub>Byte63</sub>	
DataIn1	AAD <sub>Byte64</sub>		AAD <sub>Byte65</sub>		AAD <sub>Byte66 - Byte77</sub>		0x00		0x00		DATA <sub>Byte0 - Byte45</sub>		DATA <sub>Byte46</sub>		DATA <sub>Byte47</sub>	
DataIn2	DATA <sub>Byte48</sub>		DATA <sub>Byte49</sub>		DATA <sub>Byte50 - Byte61</sub>		DATA <sub>Byte62</sub>		DATA <sub>Byte63</sub>		DATA <sub>Byte64 - Byte109</sub>					

**Figure 6: DataIn arrangement for 78-byte AAD and 110-byte data**

Figure 6 is a detailed example of 78-byte AAD and 110-byte data preparation. DataIn0, DataIn1 and DataIn2 is represent as DataIn[511:0] in the first, second and third clock cycle respectively. The first 64-byte of AAD (AAD<sub>Bytes0</sub>-AAD<sub>Bytes63</sub>) is set as DataIn0[511:504], ..., DataIn0[7:0]. The remained 14-byte of AAD (AAD<sub>Bytes64</sub>-AAD<sub>Bytes77</sub>) is set as DataIn1[511:504], ..., DataIn1[407:400] and DataIn1[399:384] must be zeros. The first 48-byte data (DATA<sub>Bytes0</sub>-DATA<sub>Bytes47</sub>) must be set as DataIn1[383:0]. Then the remained 62-byte data (DATA<sub>Bytes48</sub>-DATA<sub>Bytes109</sub>) must be set as DataIn2[511:16].

As shown in Figure 2 and Figure 3, at last operation cycle, the TagOutValid is asserted to '1' in the same clock cycle with the Finish signal is asserted to '1'. Then Busy signal is cleared to '0' in the next cycle. In case of Bypass mode is active as shown in Figure 4, the TagOut is not calculated and TagOutValid is not active.



## Verification Methods

AES256-GCM-100G IP functionality were verified on real board design by using KCU116 Evaluation Kit and ZCU106 Evaluation Board.

## Recommended Design Experience

The user must be familiar with HDL design methodology to integrate this IP into system.

## Ordering Information

This product is available directly from Design Gateway Co., Ltd. Please contact Design Gateway Co., Ltd. For pricing and additional information about this product using the contact information on the front page of this datasheet.

## Revision History

Revision	Date	Description
1.00	9/Mar/2023	New release